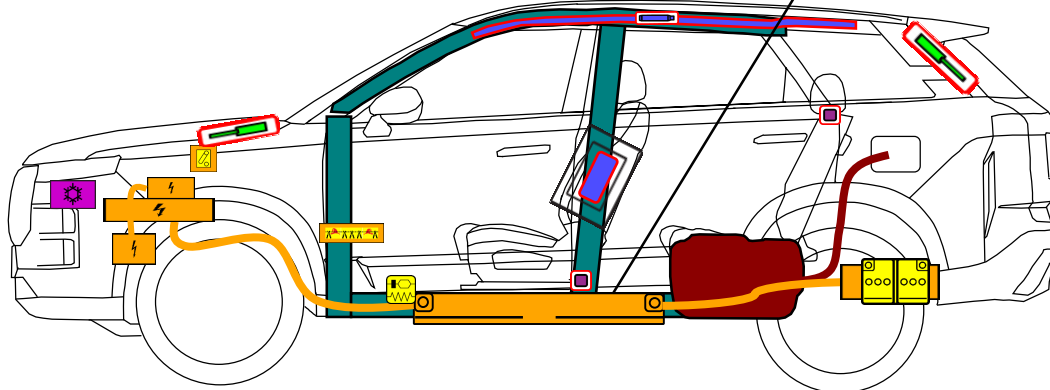
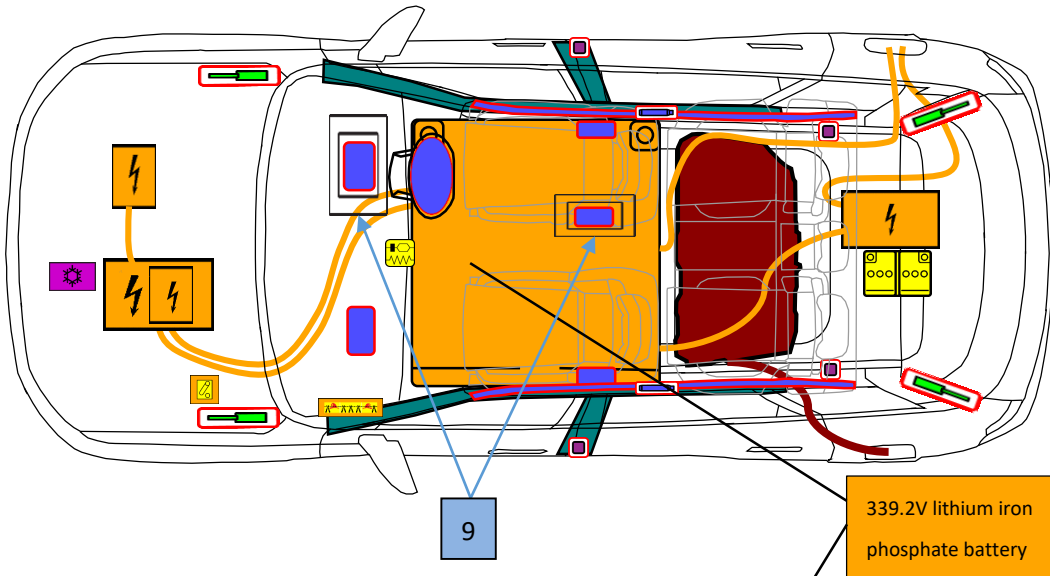


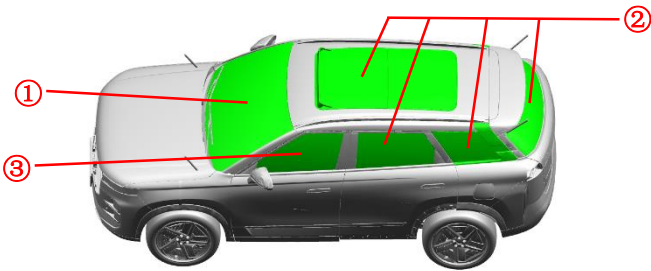
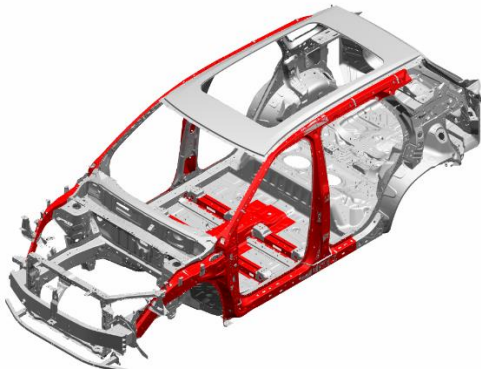




JAECOO		JAECOO7 PHEV 5-door SUV, From 2024					
							
 339.2V lithium iron phosphate battery							
	Airbag		Stored gas inflator		Seat belt pretensioner		Gas strut/preloaded spring
	High strength zone		Battery low voltage		SRS control unit		Battery pack, high-voltage
	Low voltage device that disconnects high voltage		High voltage power cable		High voltage component		Cable cut
	Fuel tank content gasoline/ethanol		Air-conditioning component		Zone requiring special attention		
			ID No.		Version date	Page	
			HL4BR5EA001		4/2025	1 of 4	

JAECOO		JAECOO7 PHEV 5-door SUV, From 2024			
1. Identification / recognition					
LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF: SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE. Brand name Model name Fuel port Charge port					
2. Immobilisation/stabilization/ lifting					
Immobilise vehicle Depress brake pedal and press button “P”, the car will automatically apply the parking brake.		Stabilisation-lifting point Appropriate lifting points Suitable stabilisation points on the side High-voltage battery			
3. Disable direct hazards / safety regulations					
In the event of an accident in which the airbag is triggered, the high voltage system is automatically deactivated as soon as airbag triggering is detected. In all other cases, the high voltage system can be deactivated as follows: Main method: For deactivation in the motor compartment, disconnect the high voltage battery. 1. Pull the release lever twice to open the hood. 2. Disconnect the high voltage. ①Push the button; ②Pull out the button					
Alternative method: Cut the wire harness in the vehicle cab, disconnect the high voltage battery. 1. Remove the carpet. 2. Cut the wire harness; follow the instructions on the label.					
		ID No. HL4BR5EA001		Version date 4/2025	
				Page 2 of 4	

JAECOO		JAECOO7 PHEV 5-door SUV, From 2024					
ACCESS TO 12V BATTERY							
 							
1. Open the boot.		2. Remove the trunk floor.		3. Disconnect the negative terminal.			
4. Access to the occupants							
■ Window Glass  Glass types: ① Laminated ② Tempered ③ Laminated, Tempered (OPT)				■ High strength body areas 			
■ Seat adjustment   POWER		■ Door latches/command  MANUAL		■ Steering column adjustment  Steering column has manual tilt and telescopic adjustment.			
5. Stored energy / liquids / gases / solids							
					12 V		
					339.2 V lithium iron phosphate battery		
					60L		
					R1234yf: 0.575kg		
 In the event of mechanical deformation of the battery system, there is a risk of a thermal reaction in the high voltage battery. Monitor the temperature of the high voltage battery! 							
		ID No.		Version date		Page	
		HL4BR5EA001		4/2025		3 of 4	

JAECOO	JAECOO7 PHEV 5-door SUV, From 2024		
---------------	--	--	--

6. In case of fire

	USE LARGE AMOUNTS OF WATER					
	POTENTIAL RISK OF BATTERY RE-IGNITION / DELAYED					



7. In case of submersion

After recovering the vehicle from the water, deactivate the high voltage system (see chapter 3) and drain the water. Wear appropriate personal protective equipment!



8. Towing / transportation / storage

■ Towing		
Front towing eyelet		Rear towing eyelet
STORE AT SAFE DISTANCE FROM OTHER VEHICLES!		BATTERY RE-IGNITION! 

■ Transportation

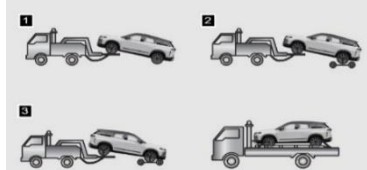①		②		Please use ① flatbed rescue vehicle to load the vehicle.
---	---	---	--	--

9. Important additional information

	Center airbag		Knee airbag	
---	---------------	--	-------------	---

10. Explanation of pictograms used

	Hybrid Electric Vehicle on fuel of liquid group 2		Use thermal Infrared camera		General warning sign		Warning, Electricity
	Seat adjustment, longitudinal		Seat height adjustment		Seat adjustment, seat back recline		Steering wheel, tilt control
	Use water to extinguish the fire		Corrosives		Flammable		Acute toxicity
	Hazardous to the human health		Environmental hazard		Bonnet		Boot
		ID No.		Version date		Page	
		HL4BR5EA001		4/2025		4 of 4	