



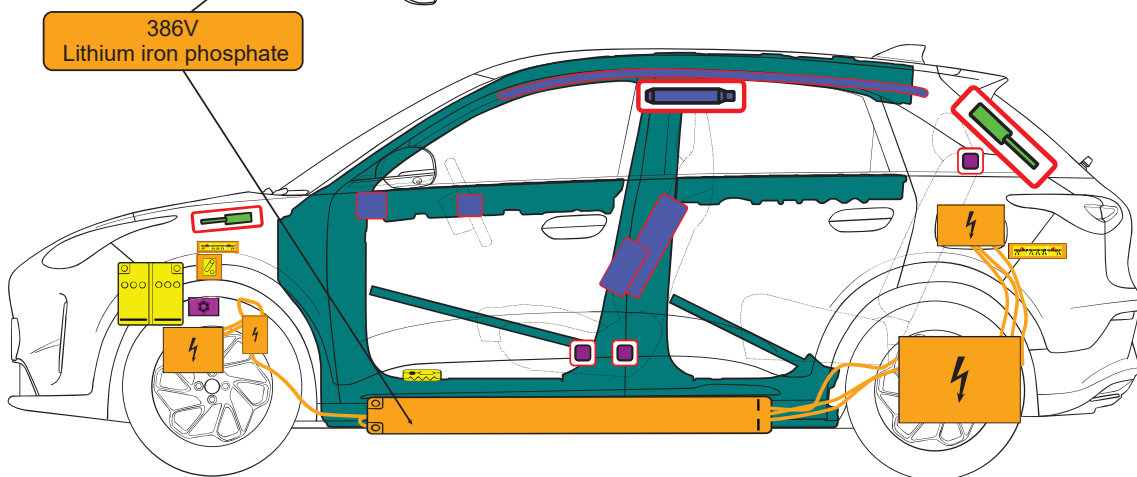

GEELY EX2

5 Doors / 5 Seats / HATCH
Starting from the 2026 model

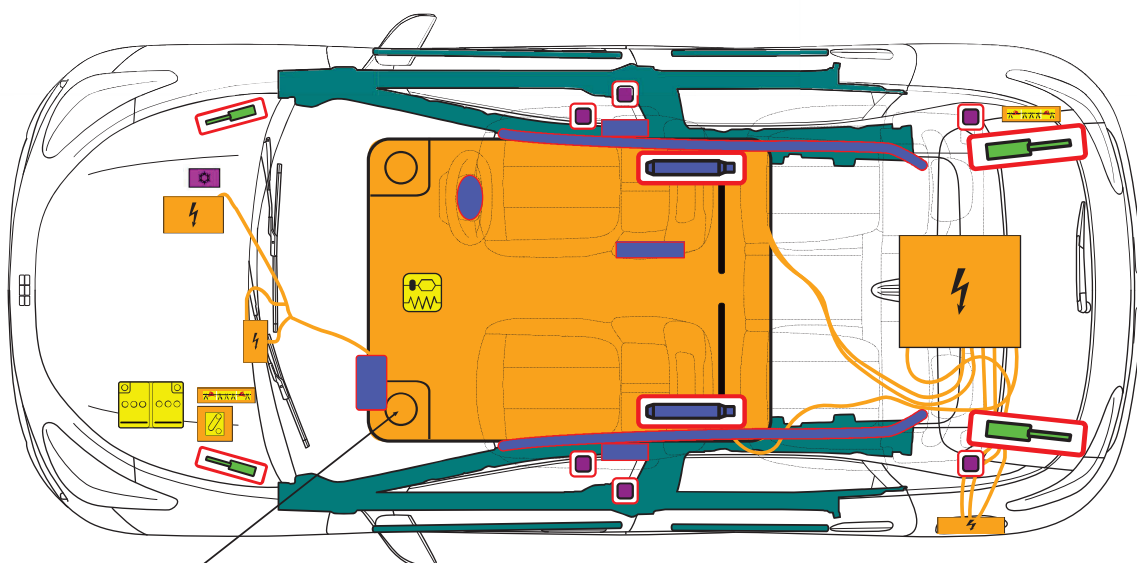

386V
Lithium iron phosphate



Airbag




Stored gas inflator




Seat belt pretensioner



SRS control unit



Battery low voltage



Gas strut /
Preloaded spring



High strength
zone



High-voltage wire
cutting point



Low voltage device
that disconnects
high voltage



High voltage
component



Battery pack,
high-voltage



High voltage power
cable



Air-conditioning
component

Internal Reference

GEELY EX2 2026 Rescue Sheet

Version

01

Creation Date

06/2026

Page

1/4



GEELY EX2

5 Doors / 5 Seats / HATCH
Starting from the 2026 model




1. Identification / recognition



No noise from the vehicle doesn't mean the vehicle is off, it might be running quietly or restarting instantly. Therefore, be sure to wear appropriate personal protective equipment.

Front Brand Logo

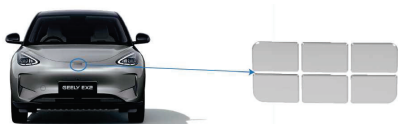

Rear Model Name




Charging Port




2. Immobilisation / stabilisation / lifting

Vehicle Securing and Parking

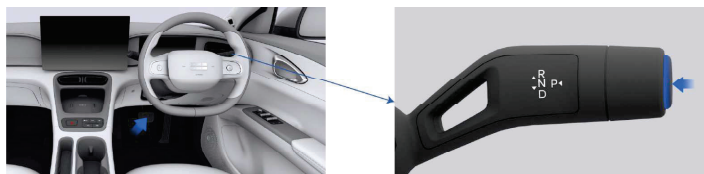

Press the brake pedal, press the P button on the gearshift lever to shift into P gear, and the P gear indicator on the combination instrument will illuminate.

Vehicle Lift Points

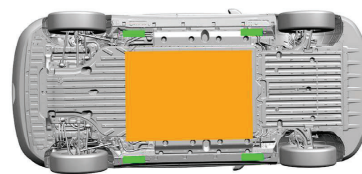


- Proper stabilise-lift points
- Power battery

3. Disable direct hazards / safety regulations

Primary mitigation method:



On the multimedia display, tap in sequence: Vehicle Settings → Vehicle Control → More, then on this screen tap the Power Off button to switch the power mode to OFF.



Alternative mitigation method 1:



Alternative mitigation method 2:



Disconnect the 12V low-voltage battery:



Loosen the 12V low-voltage battery negative cable bolt, then disconnect the 12V low-voltage battery negative.

Safety Instructions



Always assume the vehicle is powered on even when it's idle!

Always confirm the vehicle is secured, and the drive system is off; do not touch, cut, or disassemble any orange high-voltage cables and components; if a collision occurs and the seatbelt pre-tensioner/airbag is deployed, the high-voltage system will automatically shut off, but the airbag system will remain activated. Therefore, be sure to wear appropriate personal protective equipment.

Internal Reference

Version

Creation Date

Page

GEELY EX2 2026 Rescue Sheet

01

06/2026

2/4



GEELY EX2

5 Doors / 5 Seats / HATCH
Starting from the 2026 model



4. Access to the occupants

Door opening




With the smart key on your person, press the unlock/lock button on the driver's door handle. The four doors will unlock automatically. Pull the door handle to open the door.


Seat adjustment



Type 1



Type 2



Steering column adjustment



High-strength area



Glass Type

Laminated Glass

Tempered Glass



After disconnecting the 12V low-voltage battery, the electrical system components cannot be operated.

5. Stored energy / liquids / gases / solids

	386V	
	12V	
	R-1234yf 400+/-20g	

6. In case of fire

Fire extinguishing method for power battery:



Use a large amount of water to extinguish the fire.



The power battery may reignite or catch fire again!
Be sure to wear appropriate personal protective equipment.



7. In case of submersion

- When wading, the high-voltage system does not increase the risk of electric shock.
- If possible, please move the vehicle out of the water and execute the vehicle power-off procedure (see Chapter 3).

Internal Reference

GEELY EX2 2026 Rescue Sheet

Version

01

Creation Date

06/2026

Page

3/4



GEELY EX2

5 Doors / 5 Seats / HATCH
Starting from the 2026 model




8. Towing / transportation / storage


Rescue Traction Ring
Storage Location



Front Traction Ring
Installation Position

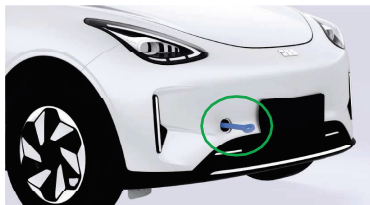

Rear Traction Ring
Installation Position

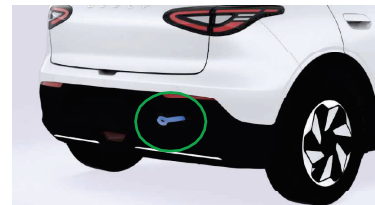

Traction



Park the vehicle in an open outdoor area and keep at least five meters away from other objects or vehicles.



The power battery may reignite or catch fire again!
Be sure to wear appropriate personal protective equipment.



9. Important additional information

When thermal runaway occurs, a thermal runaway warning will appear on the multimedia display and instrument cluster display.

The power battery may reignite or catch fire again!

Be sure to wear appropriate personal protective equipment.

You can query the information of the first rescue party through the following link:

<https://global.geely.com/en/geely-ex2-emergency-rescue-manual>

10. Explanation of pictograms used

	Electric Vehicle		Air-conditioning component		Remove smart key
	Warning, Electricity		Flammable		Seat height adjustment
	General warning sign		Hazardous to the human health		Seat adjustment, longitudinal
	Use water to extinguish the fire		Corrosives		Steering wheel, tilt control
	Bonnet		Explosive		Warning; low temperature
	Boot		Environmental hazard		
	Use thermal Infrared camera		Acute toxicity		

Internal Reference	Version	Creation Date	Page
GEELY EX2 2026 Rescue Sheet	01	06/2026	4/4