




GWM Cannon Alpha
Pickup Double Cab
From 2024

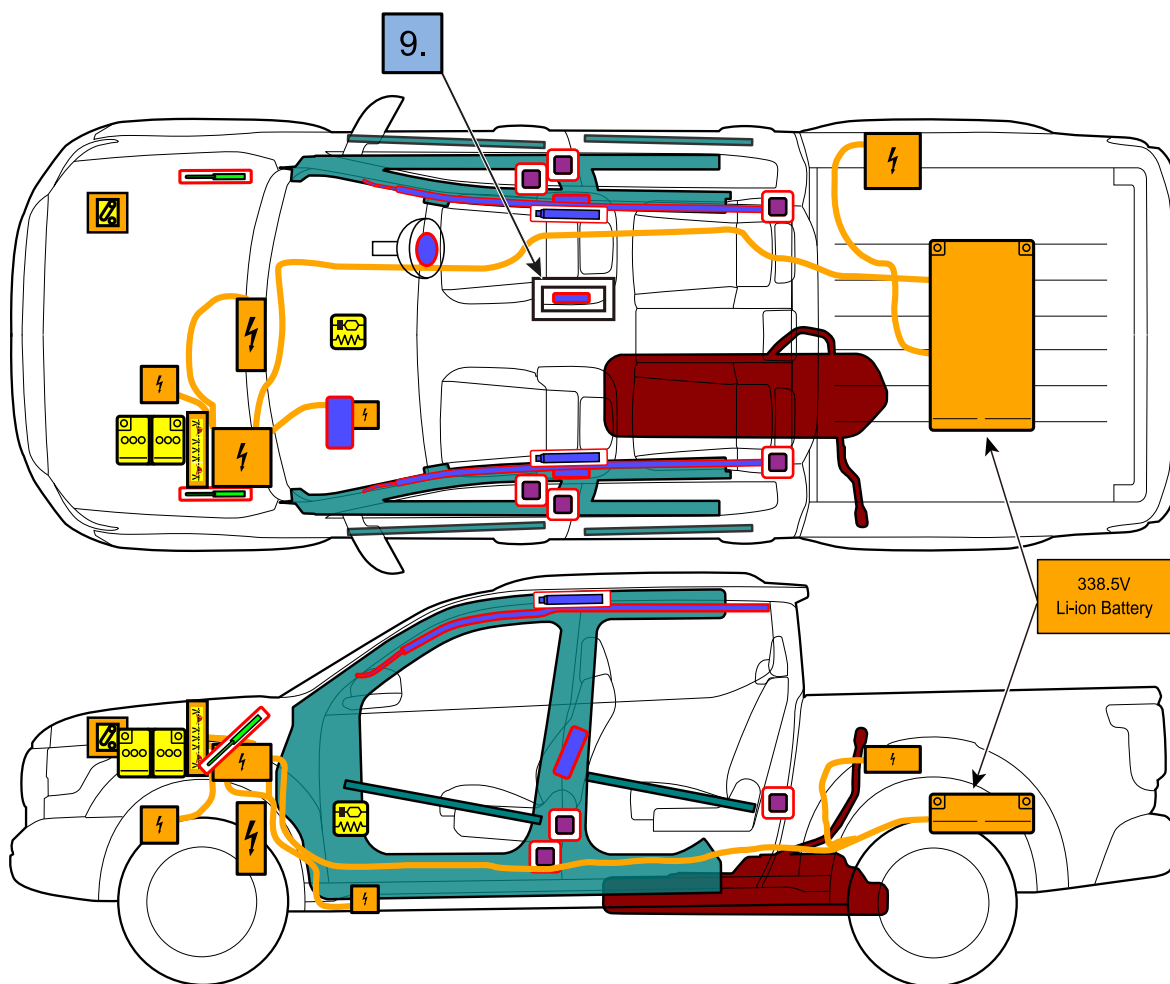

Legend

	Airbag		Airbag inflator/ stored gas inflator		Seat belt preten- sioner		SRS control unit
	Gas strut, preloaded spring		High strength zone		Zone requiring special attention		Battery, low-voltage
	High voltage power cable		Battery pack, high- voltage		Fuel tank content gasoline / ethanol		Low voltage device that disconnects high voltage
	Cable cut		High voltage compo- nent				

This overview shows the maximum range of equipment of the vehicle.

ID No.

LGW-GWM P05HEV-1

Version No.

V1

Page No.

1/4

	GWM Cannon Alpha Pickup Double Cab From 2024		
---	---	---	--

1. Identification / recognition



LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.




2. Immobilisation / stabilisation / lifting

Immobilize vehicle

- 1.Press the P button to engage the parking gear (P).
- 2.Pull up the EPB switch , ensure the vehicle is stationary.
3. Shut power off .


Stabilisation-lifting points

-  Jacking points
-  Support position

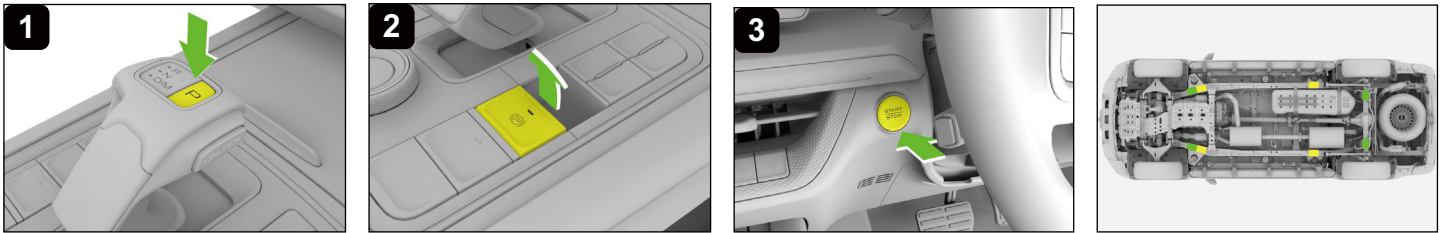


3. Disable direct hazards / safety regulations


Disabling method

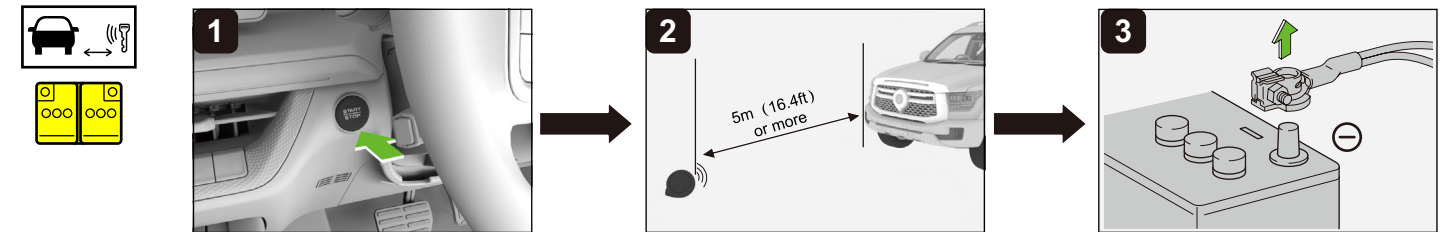

Alternative disabling method

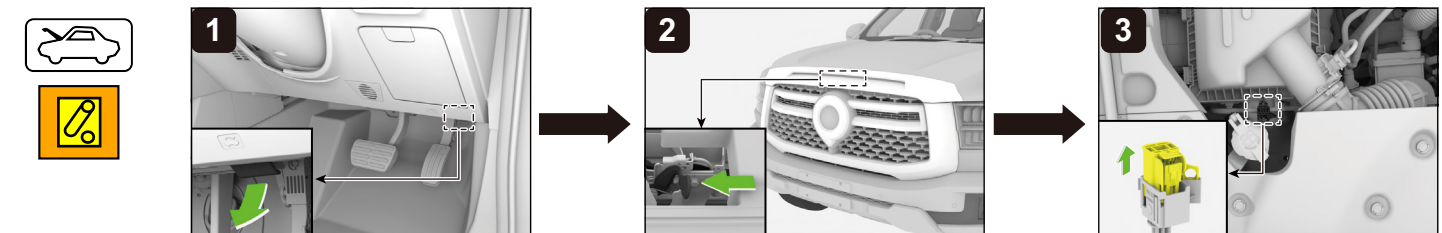


Alternative disabling method

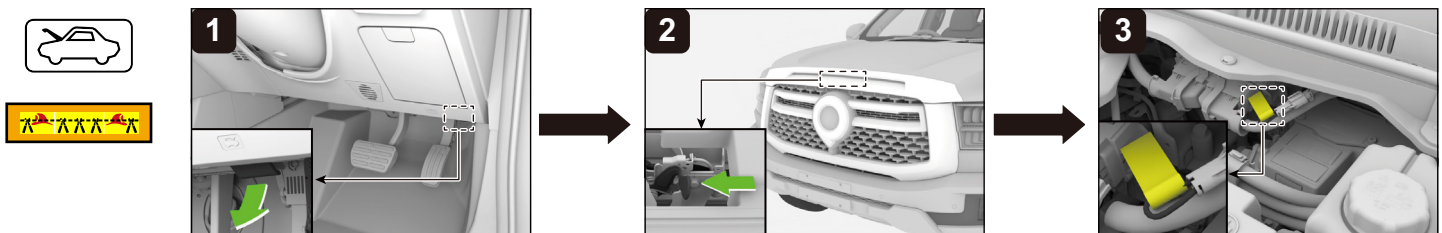


This overview shows the maximum range of equipment of the vehicle.	ID No.	Version No.	Page No.
	LGW-GWM P05HEV-1	V1	2/4


	GWM Cannon Alpha Pickup Double Cab From 2024		
---	---	---	--


Access to 12V battery

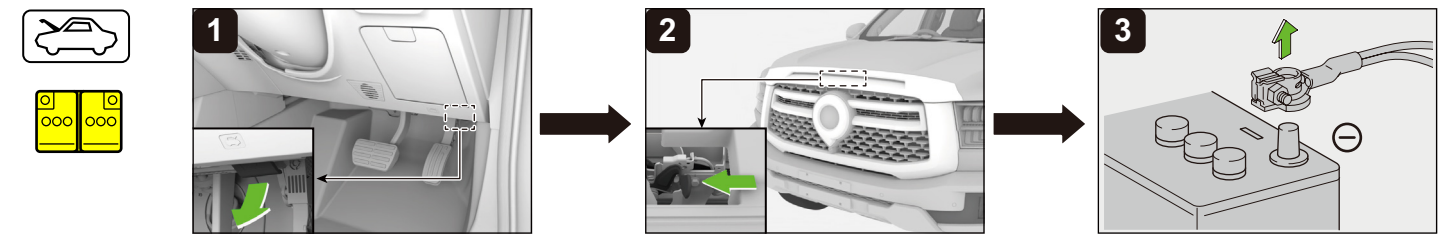

4. Access to the occupants


High strength steel in body


Electrical seat adjustment

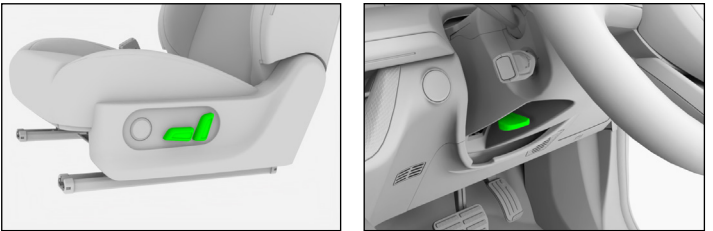
Steering column adjustment


WHEN THE 12 V BATTERY IS DISCONNECTED, ELECTRICAL COMPONENTS CANNOT BE OPERATED.

Glass types

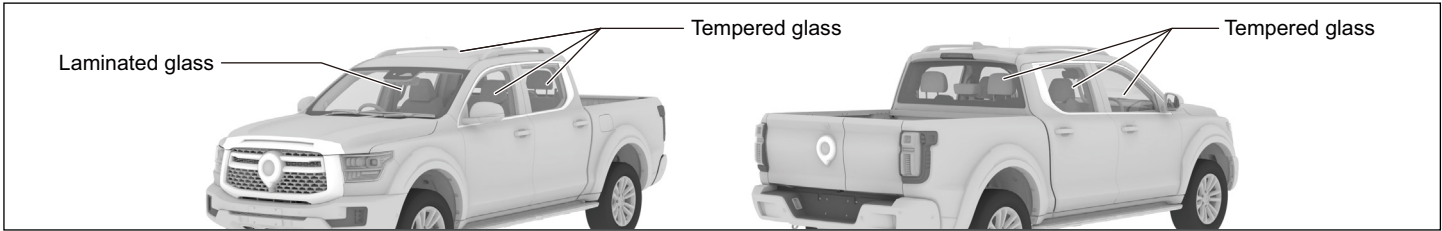


5. Stored energy / liquids / gases / solids

	  	12 V		 	80 ±3 L
	    	338.5 V		 	HFC-134a 600 g

6. In case of fire


USE LARGE AMOUNTS OF WATER

If it is difficult to apply copious amounts of water to the high voltage battery, it is recommended to allow the high voltage battery to burn itself out.




BATTERY RE-IGNITION !






7. In case of submersion

Proper personal protective equipment should be worn when handling any flooded vehicle. Pull the vehicle out of water as much as possible, immobilize the vehicle and disable the vehicle before starting any operation (refer to chapter 3).


Tilt the vehicle to one side to allow water to drain out of the vehicle.

This overview shows the maximum range of equipment of the vehicle.	ID No.	Version No.	Page No.
	LGW-GWM P05HEV-1	V1	3/4



	GWM Cannon Alpha Pickup Double Cab From 2024		
---	---	---	--

8. Towing / transportation / storage

Location front hook




Location rear hook

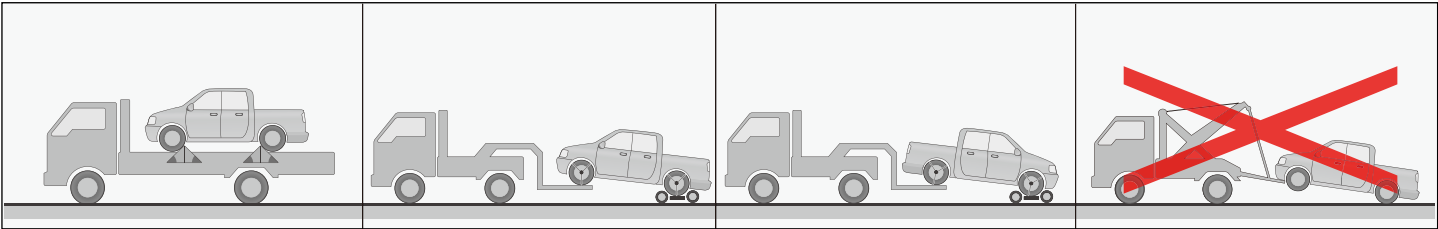



STORE AT SAFE DISTANCE FROM OTHER VEHICLES!





BATTERY RE-IGNITION !

9. Important additional information




Driver's seat has a far side airbag in addition to the side airbag. Location of far side airbag is shown in the mark

9.


 on page 1.

10. Explanation of pictograms used

Pictogram	Designation
	Hybrid Electric Vehicle on fuel of liquid group 2
	Remove smart key
	Bonnet
	Use thermal Infrared camera
	Warning, Electricity

Pictogram	Designation
	Flammable
	Explosive
	Corrosives
	Acute toxicity


Pictogram	Designation
	Hazardous to the human health
	Use water to extinguish the fire
	Air-conditioning component
	General warning sign

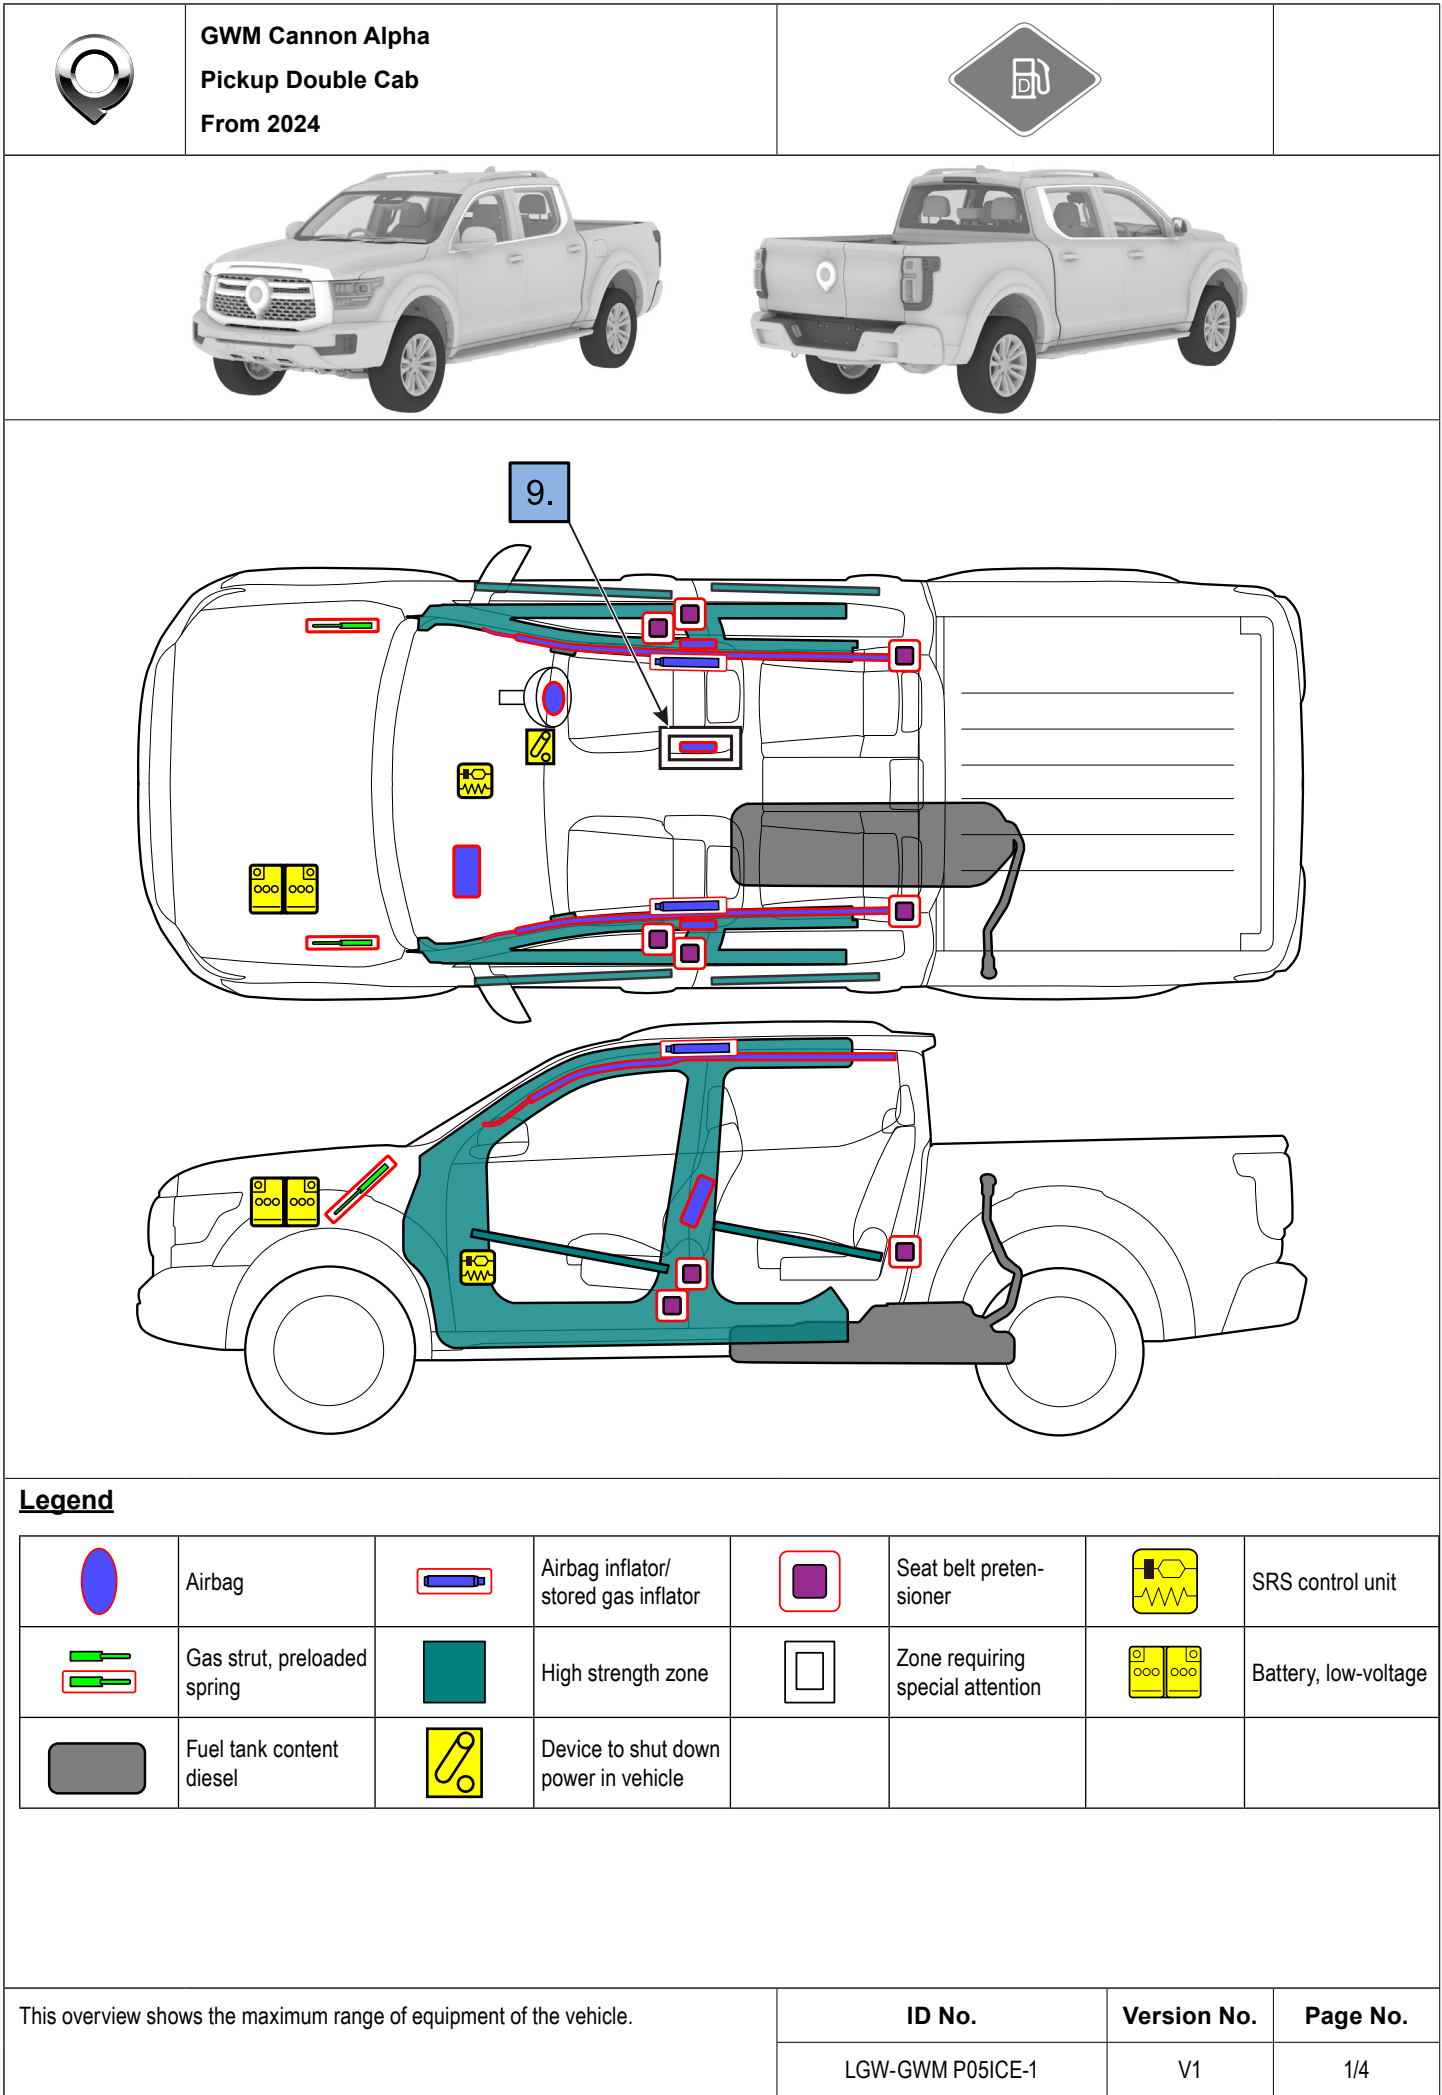


	GWM Cannon Alpha Pickup Double Cab From 2024		
---	---	---	--

1. Identification / recognition

Front car logos position



Rear car logos position




2. Immobilisation / stabilisation / lifting

Immobilize vehicle

- 1.Press the P button to engage the parking gear (P).
- 2.Pull up the EPB switch , ensure the vehicle is stationary.
3. Shut power off .

Stabilisation-lifting points

-  Jacking points
-  Support position

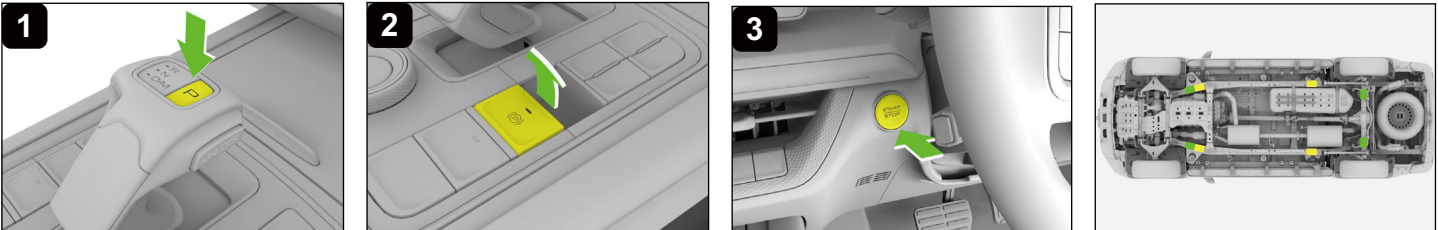


3. Disable direct hazards / safety regulations




EVEN IF THE ENGINE IS STOPPED, THE VEHICLE MAY NOT BE SHUT OFF. IF THE VEHICLE IS NOT COMPLETELY SHUT OFF, THE ENGINE MAY SUDDENLY START OR THE VEHICLE MAY START TO MOVE.

Disabling method

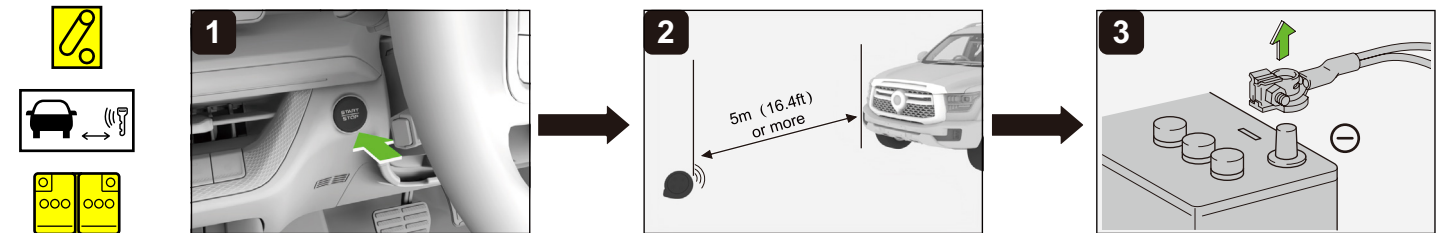

Access to 12V battery

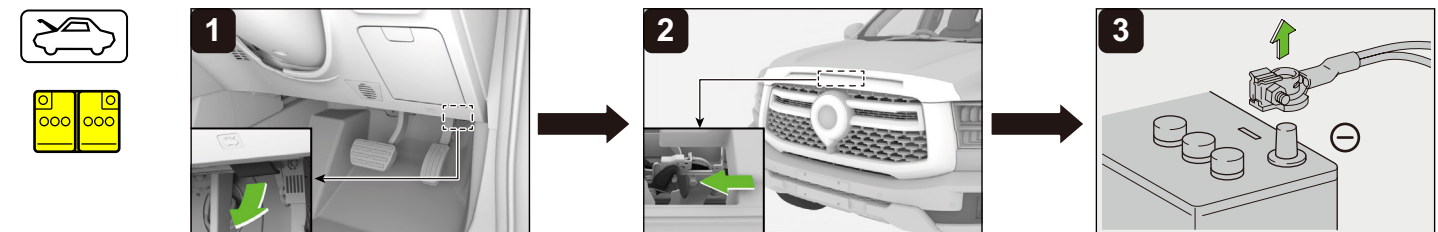


	GWM Cannon Alpha Pickup Double Cab From 2024		
---	---	---	--

4. Access to the occupants

High strength steel in body


Electrical seat adjustment

Steering column adjustment

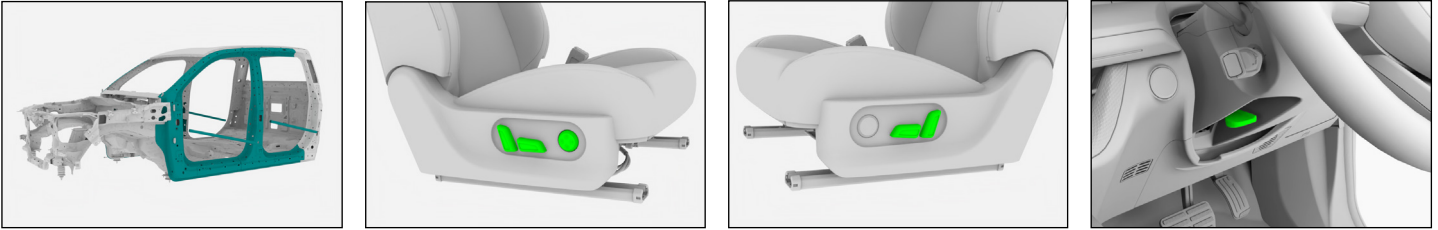

WHEN THE 12 V BATTERY IS DISCONNECTED, ELECTRICAL COMPONENTS CANNOT BE OPERATED.

Glass types

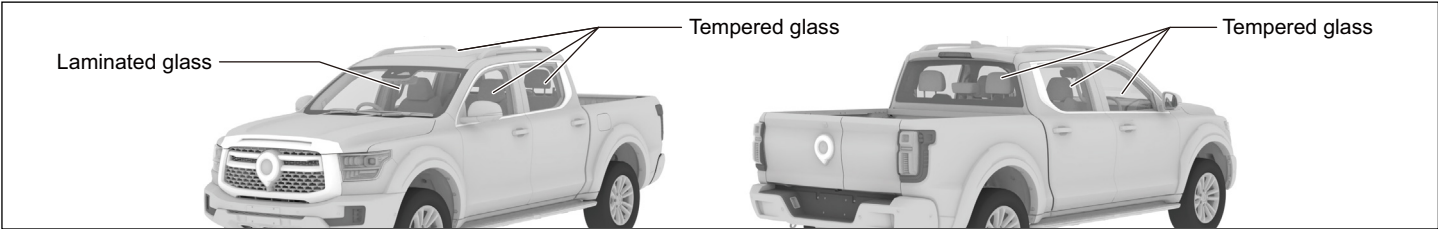

5. Stored energy / liquids / gases / solids

	  	12 V
	 	78 ±3 L
	 	HFC-134a 550 g

6. In case of fire

	USE LARGE AMOUNTS OF WATER	   
---	-----------------------------------	--

7. In case of submersion

Proper personal protective equipment should be worn when handling any flooded vehicle. Pull the vehicle out of water as much as possible, immobilize the vehicle and disable the vehicle before starting any operation (refer to chapter 3).


Tilt the vehicle to one side to allow water to drain out of the vehicle.

This overview shows the maximum range of equipment of the vehicle.	ID No.	Version No.	Page No.
	LGW-GWM P05ICE-1	V1	3/4


	GWM Cannon Alpha Pickup Double Cab From 2024		
---	---	---	--

8. Towing / transportation / storage

Location front hook



Location rear hook

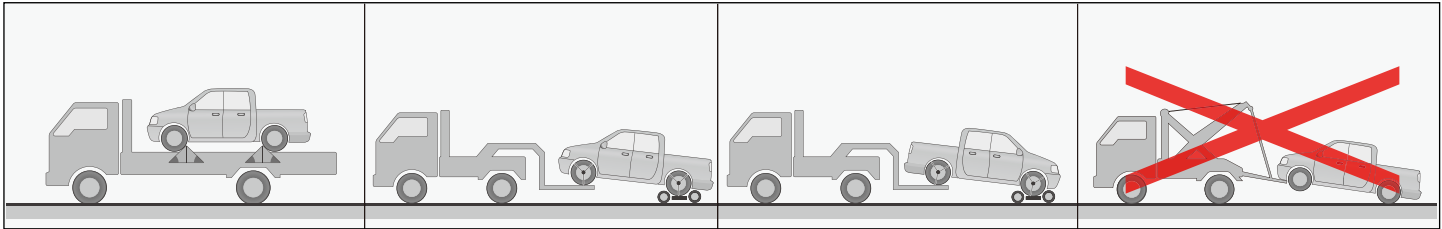



STORE AT SAFE DISTANCE FROM OTHER VEHICLES!

9. Important additional information




Driver's seat has a far side airbag in addition to the side airbag. Location of far side airbag is shown in the mark

9.

 on page 1.

10. Explanation of pictograms used

Pictogram	Designation	Pictogram	Designation	Pictogram	Designation
	Vehicle on fuel of liquid group 1		Flammable		Hazardous to the human health
	Remove smart key		Explosive		Use water to extinguish the fire
	Bonnet		Corrosives		Air-conditioning component
	General warning sign				