




TOYOTA LAND CRUISER

2021-7

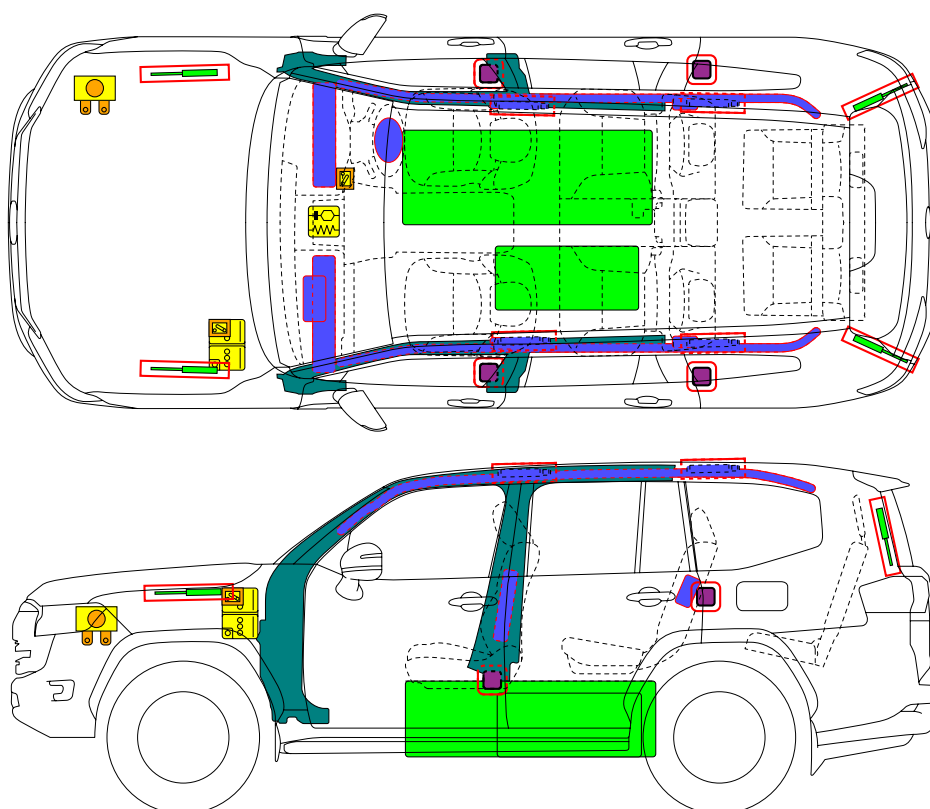

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut / Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable / component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage
	Low voltage device that disconnects high voltage								
ID No.		Version No.		Version date		Page			
LANDCRUISER300		01		07 / 2021		1 / 4			


1. Identification / Recognition

■ Location of vehicle badges




2. Immobilisation / Stabilisation / Lifting

■ Completely immobilize the vehicle

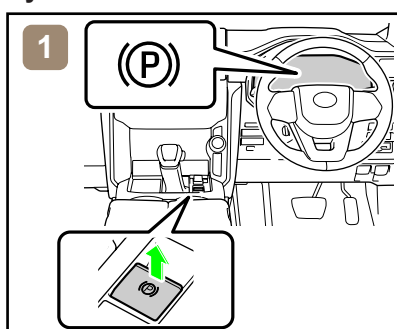


1. Chock the wheels and engage the parking brake.

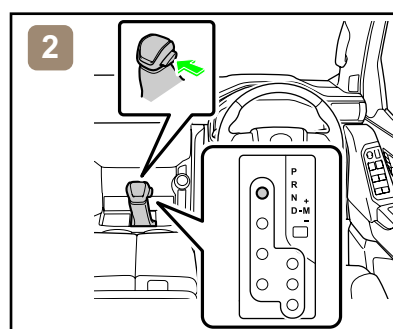

2. Move the shift lever to the park (P) position.

■ Stabilisation-lifting point

Place cribbing such as wooden blocks at the four points under the front and rear pillars.

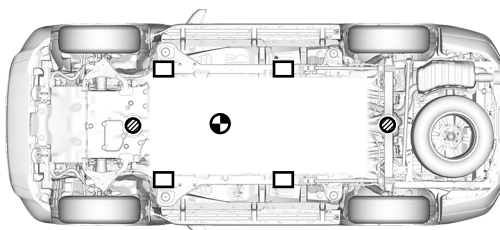

Extra Reinforced Lifting Points



Standard Jack Locations



Vehicle Center of Gravity



Do not place cribbing such as wooden blocks or rescue air lifting bags under the exhaust system or fuel system. Doing so may result in fuel leaks or fire.

3. Disable direct hazards / Safety regulations

■ If any of the following systems are required to be operated, operate them **BEFORE** disconnecting the battery.

Power door lock

Electric parking brake

Sliding roof

Power window

Power tilt and telescopic steering

Power back door opener

Power seat




When the 12 V battery is disconnected, electrical components cannot be operated.


	ID No.	Version No.	Version date	Page
	LANDCRUISER300	01	07 / 2021	2 / 4

■ Perform procedure Main or Alternative to completely shut off the vehicle.


<Procedure Main>

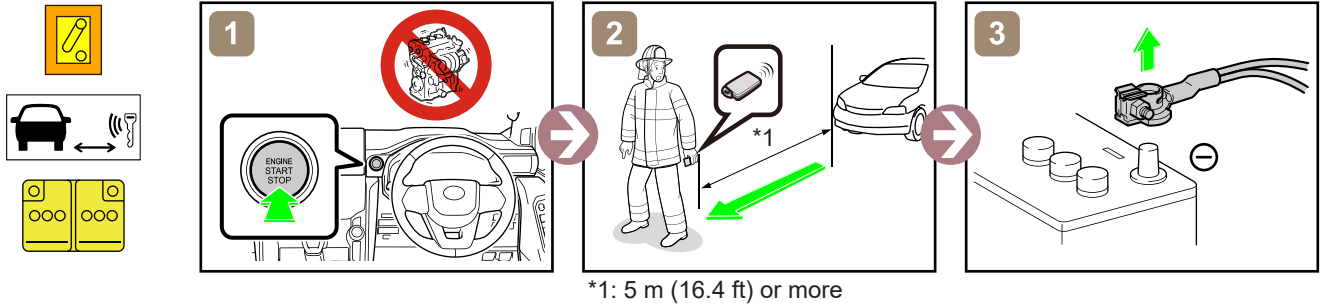

<Procedure Alternative>

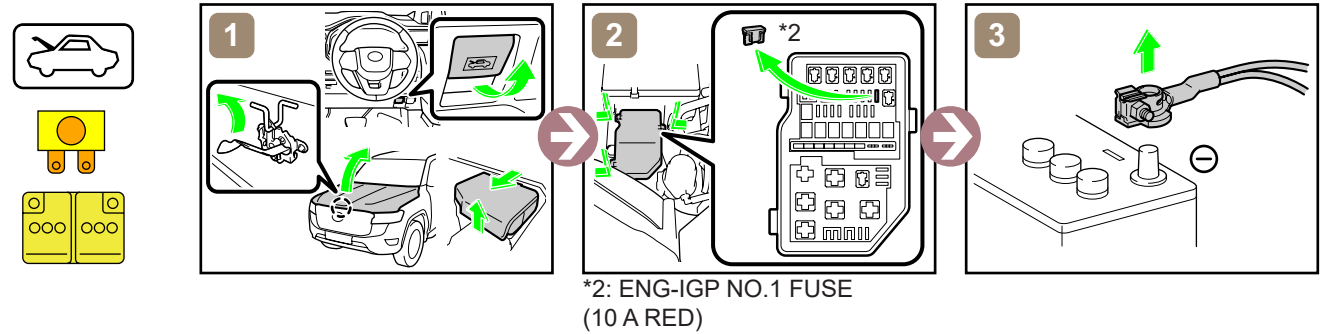


■ Access to 12 V Battery

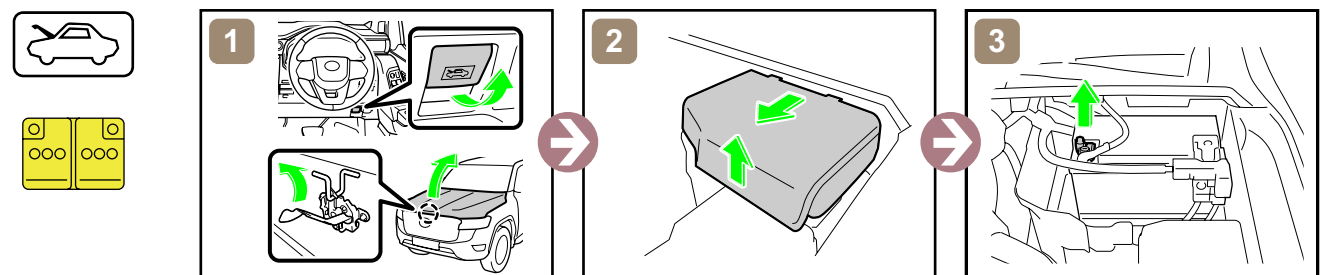

4. Access to the occupants

■ Window Glass

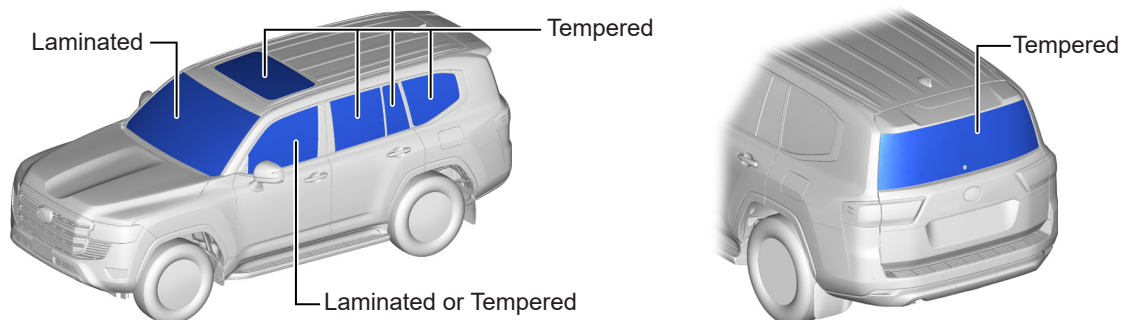

ID No.	Version No.	Version date	Page
LANDCRUISER300	01	07 / 2021	3 / 4

5. Stored energy / Liquids / Gases / Solids



12 V Battery



Diesel Tank: 110 L (80 L, 30 L)




Always wear appropriate personal protective equipment (PPE) when dealing with any of these items.

6. In case of fire



RE-IGNITION POSSIBLE !






7. In case of submersion



Work on the vehicle only after the vehicle has been pulled out of the water.

8. Towing / Transportation / Storage

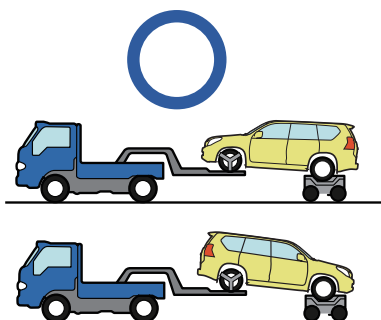

RE-IGNITION POSSIBLE !

Store the vehicle at a safe distance (15 m (49.2 ft) or more) from other vehicles.

9. Important additional information

For further details, please refer to "Emergency Response Guide".

	ID No.	Version No.	Version date	Page
	LANDCRUISER300	01	07 / 2021	4 / 4