

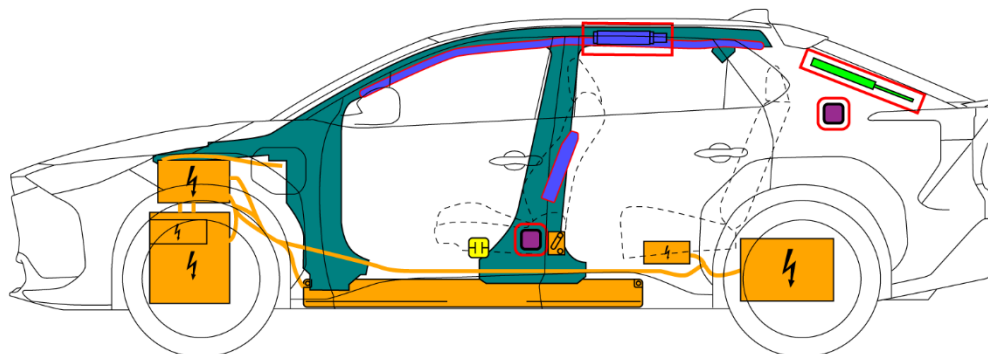
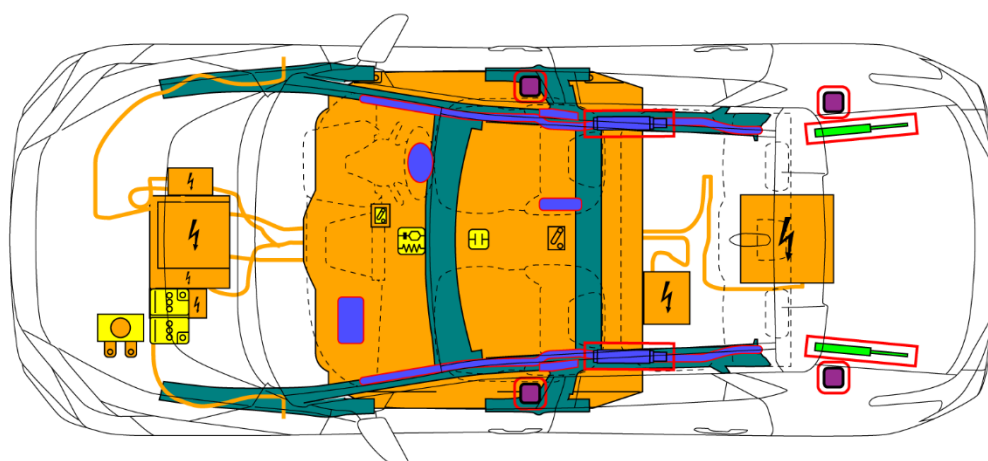


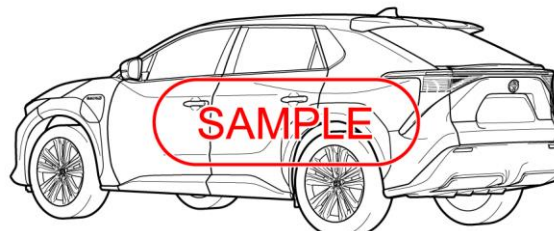




TOYOTA bZ4X
5 doors / 5 seats / wagon
2022-03

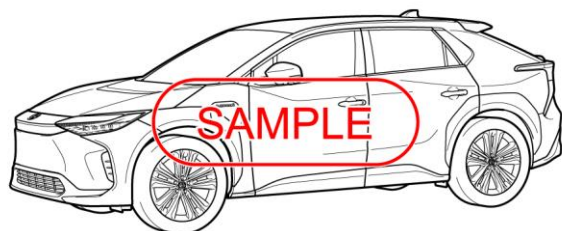

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Gas strut / Preloaded spring
	High strength zone		Battery low voltage		Ultra-capacitor, low-voltage		Battery pack, high-voltage		High voltage power cable / component
	High voltage device that disconnects high voltage		Fuse box disabling high voltage		Low voltage device that disconnects high voltage				
ID No.		Version No.		Version date		Page			
bZ4X10		02		06 / 2023		1 / 4			

1. Identification / Recognition

Location of vehicle badges

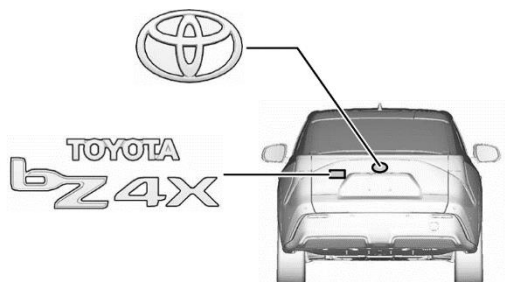


Energy source: Lithium-ion battery




2. Immobilisation / Stabilisation / Lifting

Completely immobilize the vehicle

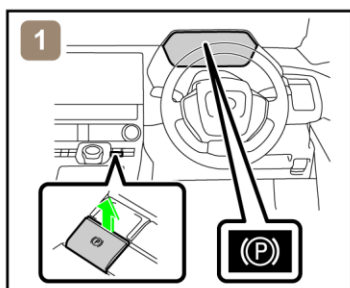


- 1) Chock the wheels and engage the parking brake.



- 2) Press the P position switch.

Stabilisation-lifting point

Place cribbing such as wooden blocks at the four points under the front and rear pillars.

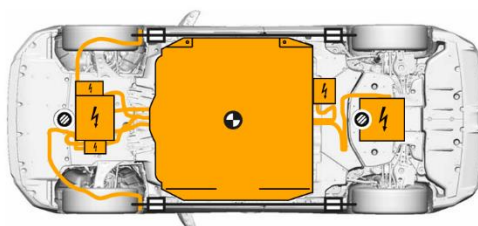

Extra Reinforced Lifting Points



Standard Jack Locations



Vehicle Center of Gravity



Do not place cribbing such as wooden blocks or rescue air lifting bags under the exhaust system, fuel system or high voltage power cables. Doing so may result in fuel leaks, fire, or electric shock.

	ID No.	Version No.	Version date	Page
	bZ4X10	02	06 / 2023	2 / 4

3. Disable direct hazards / Safety regulations

If any of the following systems are required to be operated, operate them **BEFORE** disconnecting the battery.

Power door lock
Power Back door


Power window
Electric parking brake

Power seat
Electronic shift matic

When the 12 V battery is disconnected, electrical components cannot be operated.


■ Perform procedure Main or Alternative to completely shut off the vehicle.

< Main Procedure >

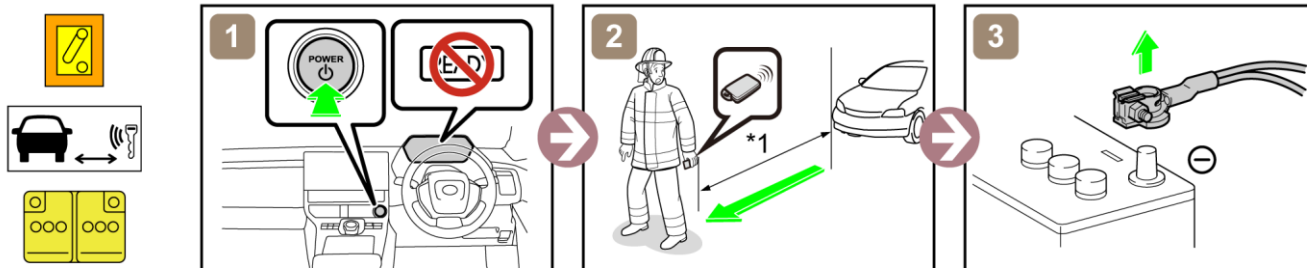


*1: 5 m (16.4 ft) or more

< Alternative Procedure >

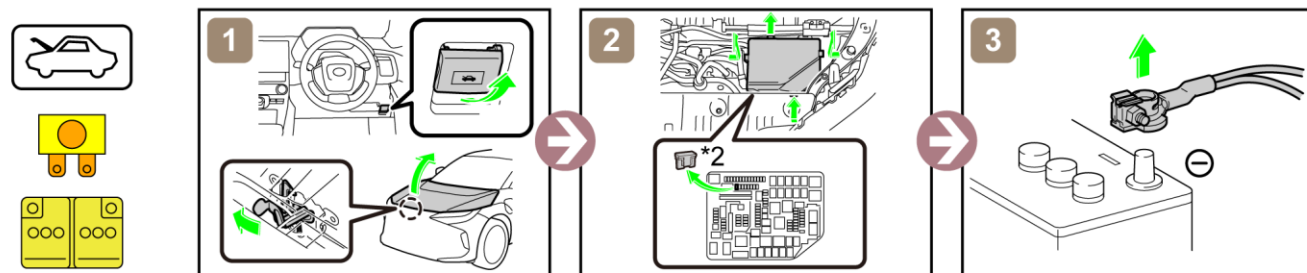


*2: IGP-MAIN NO.1 (30 A GREEN)

Access to 12 V Battery

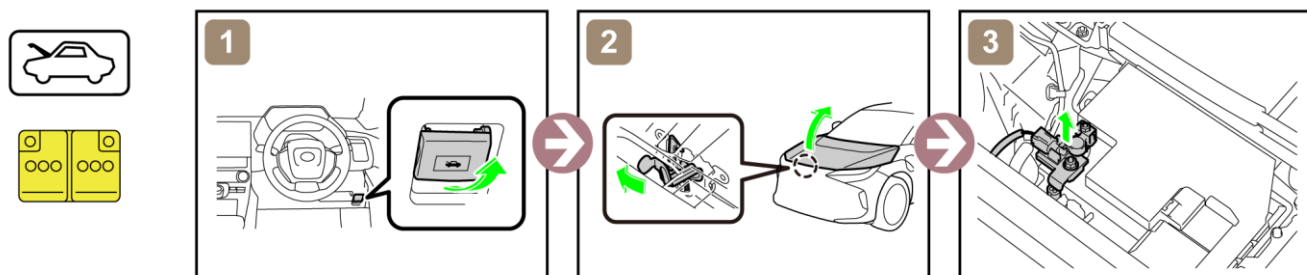

4. Access to the occupants

Window Glass

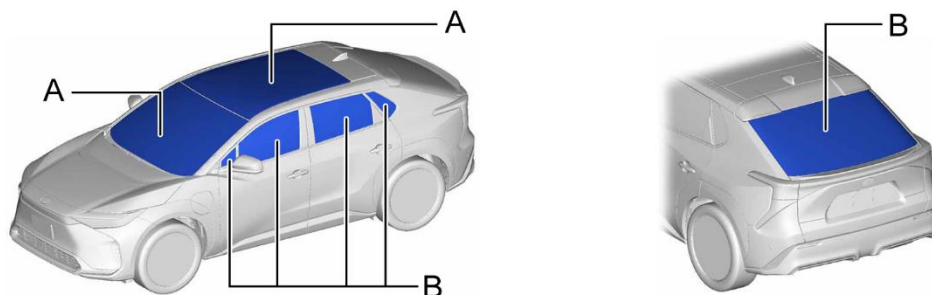

A	Laminated	B	Tempered
---	-----------	---	----------

	ID No.	Version No.	Version date	Page
	bZ4X10	02	06 / 2023	3 / 4

5. Stored energy / Liquids / Gases / Solids



High Voltage Li-ion Battery



12 V Battery



- Always wear appropriate personal protective equipment (PPE) when dealing with any of these items.
- Never breach or remove the battery assembly cover under any circumstances, including fire. Doing so may result in serious injury or death from severe burns or electric shock.

6. In case of fire



USE COPIOUS AMOUNTS OF WATER

If it is difficult to apply copious amounts of water to the high voltage battery, it is recommended to allow the high voltage battery to burn itself out.



RE-IGNITION POSSIBLE !






7. In case of submersion



Do not touch any of the high-voltage components or cables, including the service plug, while the vehicle is submerged. Doing so may result in electric shock.
Work on the vehicle only after the vehicle has been pulled out of the water.

8. Towing / Transportation / Storage



RE-IGNITION POSSIBLE !

Store the vehicle at a safe distance (15 m (49.2 ft) or more) from other vehicles.

9. Important additional information

For further details, please refer to “Emergency Response Guide”.

	ID No.	Version No.	Version date	Page
	bZ4X10	02	06 / 2023	4 / 4