




MITSUBISHI OUTLANDER PHEV

Body type: Station wagon

Type: GG2W, GG3W Model year: 2016 – 2020

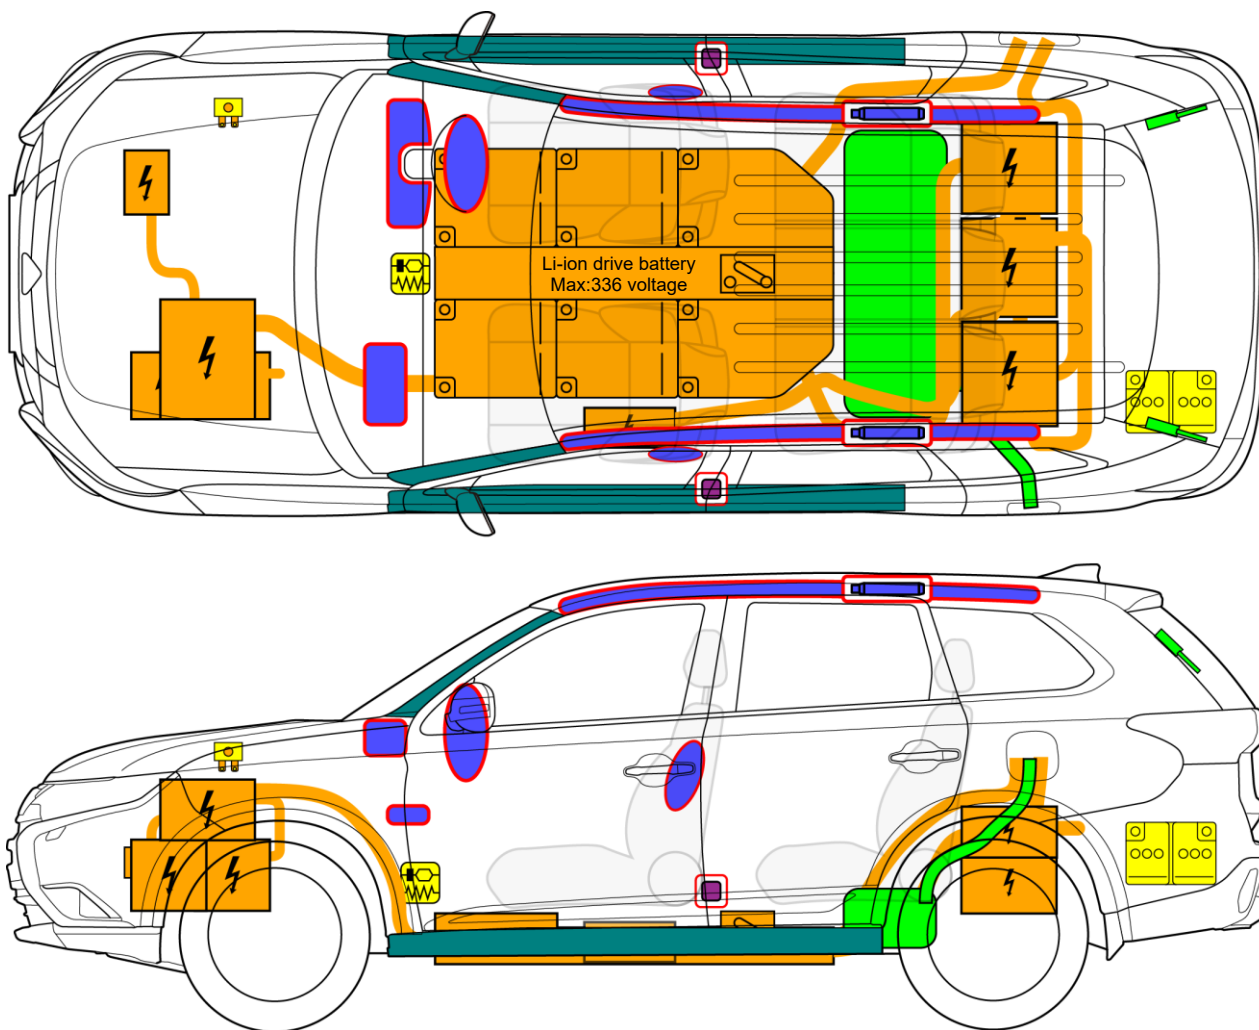

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut / Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable / component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage
ID No.				Version No.		Version Date.		Page	
GGW-ANRS-EN02				02		8/2024		1/4	



MITSUBISHI OUTLANDER PHEV

Body type: Station wagon

Type: GG2W, GG3W Model year: 2016 – 2020-




1. Identification / recognition

Features on vehicle exterior




2. Immobilisation / stabilization / lifting

How to determine if vehicle is ON / OFF





Support positions for Jack and Lift

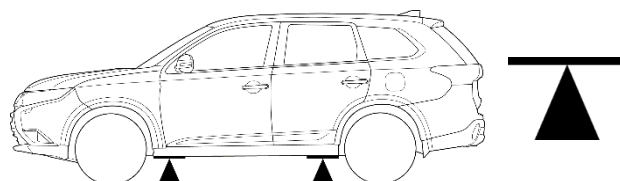

3. Disable direct hazards / safety regulations



1. How to disconnect the 12V auxiliary battery negative terminal

Wait 1 minutes
after turning off the
POWER SWITCH.

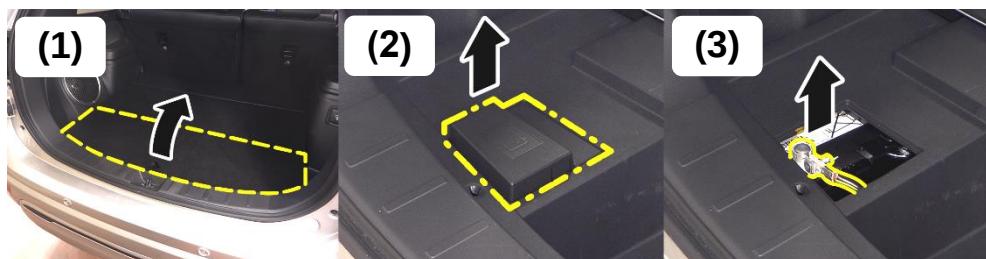

2. How to disconnect the “Power unit control” fuse

If you cannot locate this fuse, remove all fuses and relays in the fuse box.

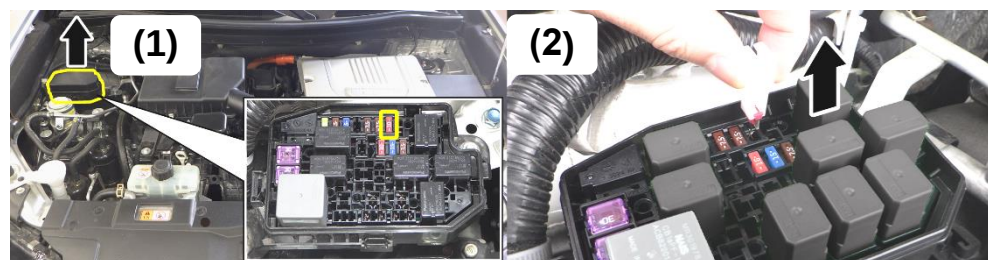


3. Use insulating Personal Protective Equipment (PPE) (Rubber insulating gloves, Rubber soled insulating)




4. How to shut down High voltage (pull out the service plug)

Next page




Wait 5 minutes
after disconnecting the
12V auxiliary battery
negative terminal

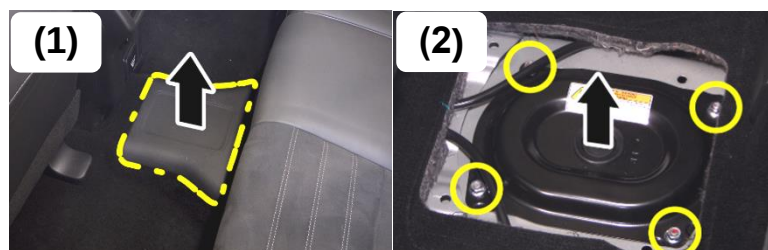


	ID No.	Version No.	Version Date.	Page
	GGW-ANRS-EN02	02	8/2024	2/4

	MITSUBISHI OUTLANDER PHEV Body type: Station wagon Type: GG2W, GG3W Model year: 2016 – 2020		
--	--	---	--

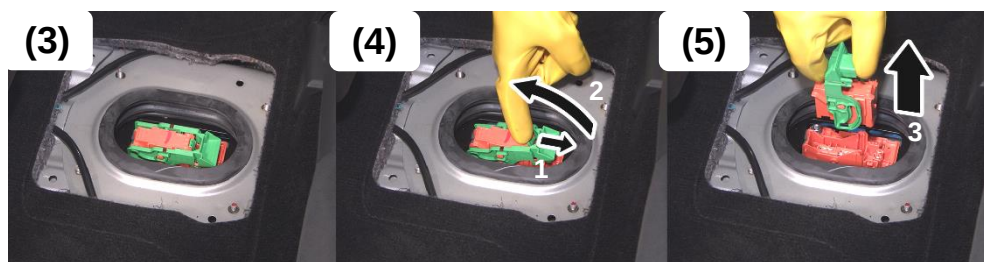


4. Access to the occupants

Vehicle CUT Zones


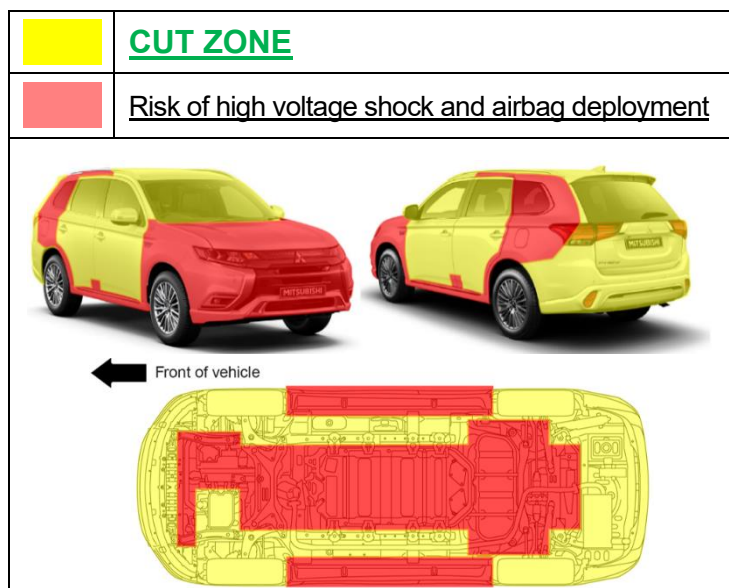


High-tensile and Ultra-high-tensile steel panels location

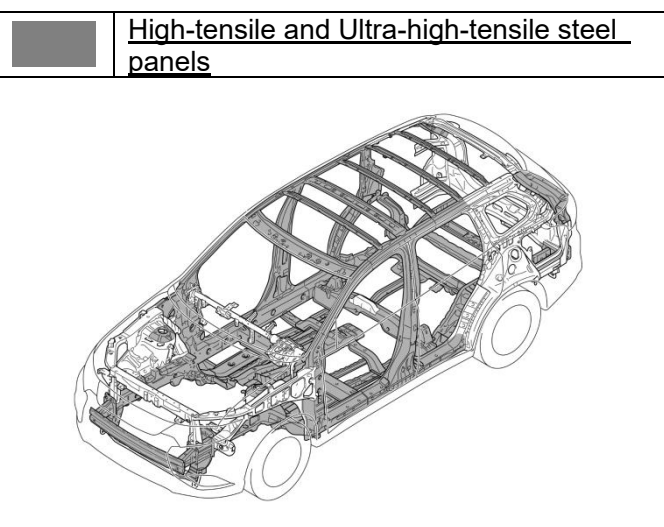

5. Stored energy / liquids / gases / solids

Fluids / gases used in this vehicle

	Unit name	Capacity & Type	Designation	Colour
	Fuel tank	45 liters	Petrol	Light orange
	Li-ion drive battery	12 kWh (2016-2018MY) 13.8 kWh (2019-2020MY)	Electrolyte	Clear & colourless
	12V auxiliary battery	36 Ah	Electrolyte	Clear & colourless



6. In case of fire



Use large amount of water



RE-IGNITION POSSIBLE !



Never use seawater or any water containing salt.

	ID No.	Version No.	Version Date.	Page
	GGW-ANRS-EN02	02	8/2024	3/4



MITSUBISHI OUTLANDER PHEV

Body type: Station wagon

Type: GG2W, GG3W Model year: 2016 – 2020



7. In case of submersion

Submerged Vehicle

- If the vehicle is submerged or partially submerged, first pull the occupants out of the vehicle and water.
- Then shut down the high voltage system. (Refer to **3-2. How to disconnect the “Power unit control” fuse** and **3-4. How to shut down High voltage (pull out the service plug)**)
- If the vehicle is submerged, the drive battery may generate flammable hydrogen gas.
- If the vehicle is submerged, water may enter the drive battery.



8. Towing / transportation / storage


How to Transport




9. Important additional information

1. Supplemental Restraint System (SRS)

2. High-voltage component location

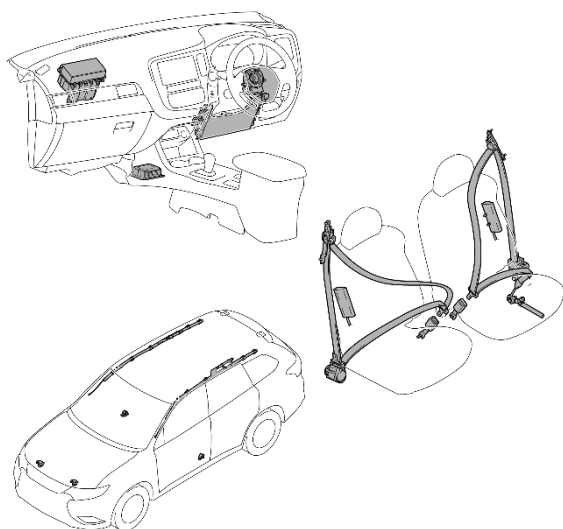

Disconnect the negative auxiliary battery terminal and wait for 1 minutes or more before starting work.

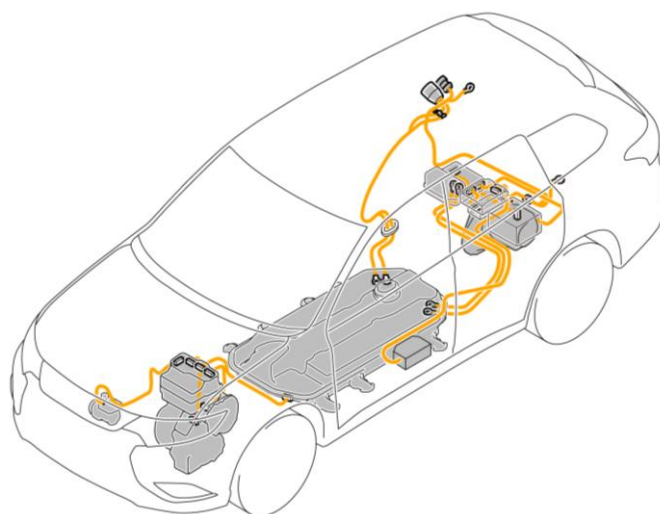

Disconnect the service plug and wait for 5 minutes or more before starting work.

3. Discharge measures for drive battery

For the detail, please refer to Emergency Response Guide.

10. Explanation of pictograms used

	Bonnet		Flammable		Explosive		General warning sign
	Boot		Hazardous to the human health		Corrosives		Warning, Electricity
	Lifting point; central support		Use water to extinguish the fire		Acute toxicity		Use thermal infrared camera

ID No.	Version No.	Version Date.	Page
GGW-ANRS-EN02	02	8/2024	4/4